


# Anello Pendant

PENDANT

TYPE  
PROJECT

## Overview

- Modern extruded aluminum ring with clean curves and a bold presence.
- Direct or Direct/Indirect light distribution
- Available in various sizes
- Standard color white, black, silver RAL/Pantone#

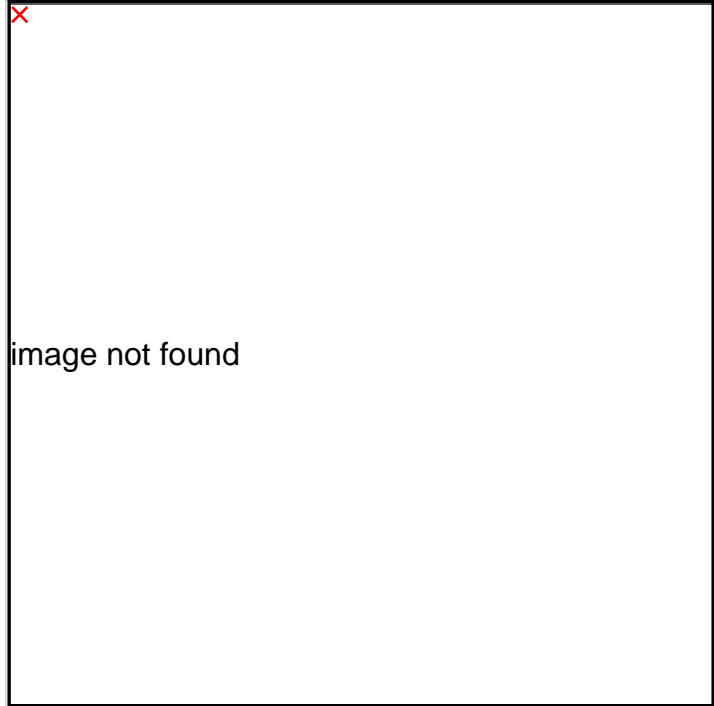

## Ordering Format

PART NUMBER: ANL-P

| Size  | Lumens Direct   | Lumens Indirect   | CCT Available   | CRI Available  |
|---|---|---|---|--|
| <b>3</b> = 3 Feet   | <b>D3</b> = 350 Lumens  | <b>I3</b> = 350 Lumens  | <b>27</b> = 2700 Kelvins  | <b>80</b> = 80-85 CRI  |
| <b>6</b> = 6 Feet   | <b>D5</b> = 500 Lumens  | <b>I5</b> = 500 Lumens  | <b>30</b> = 3000 Kelvins  | <b>90</b> = 90-95 CRI  |
| <b>9</b> = 9 Feet   | <b>D7</b> = 750 Lumens  | <b>I7</b> = 750 Lumens  | <b>35</b> = 3500 Kelvins  |  |
| <b>12</b> = 12 Feet   | <b>D10</b> = 1000 Lumens  | <b>D10</b> = 1000 Lumens  | <b>40</b> = 4000 Kelvins  |  |
| <b>CL</b> = Custom Size, add in notes                               |   | <b>NN</b> = Not Needed  | <b>TW</b> = Tunable White<br>2700-5000 Kelvins  |  |
| Optics  | Mounting  | Driver / Voltage  | Color   | Options  |
| <b>OW</b> = Opal White<br><b>OW/MC</b> = D-Opal White I-Matte Clear | <b>AC1</b> = 5' Cable, Canopy-PF 5in + Sup. 5in<br><b>AC2</b> = 5' Cable, Canopy-PF 5in + Sup. 2in<br><b>AC3</b> = 5' Cable, 5<br><b>ACC</b> = Custom Length , add in notes<br><b>ST2</b> = 2' Stem, Canopy-PF 5in + Sup. 5in<br><b>ST3</b> = 3' Stem, Canopy-PF 5in + Sup. 5in<br><b>ST4</b> = 4' Stem, Canopy-PF 5in + Sup. 5in | <b>ND</b> = Non-Dim Universal 120-277VAC<br><b>ZT</b> = 0-10v Dimming Universal 120-277VAC<br><b>CC</b> = Custom Control - add in notes | <b>W</b> = Standard White<br><b>BK</b> = Standard Black<br><b>SVR</b> = Standard Silver<br><b>RAL</b> = Enter RAL# or Pantone# in notes | <b>SP</b> = Special - enter in notes.<br><b>EMD</b> = Emergency Driver - Battery Backup 120-277VAC |

# Anello Pendant

PENDANT

TYPE

PROJECT

|  |                                       |  |  |  |
|--|---------------------------------------|--|--|--|
|  | STC = Custom Length ,<br>add in notes |  |  |  |
|--|---------------------------------------|--|--|--|

NOTES

|  |
|--|
|  |
|--|

|               |
|---------------|
| ORDER NUMBER: |
|---------------|

# Anello Pendant

PENDANT

TYPE

PROJECT

## Construction & Mounting

### HOUSING

Extruded aluminum rings are supplied in nominal sizes of 4-30 feet. Each ring can be shipped containing from 2-4 sections that are locked together with ring clamps for perfect joint connection. Easy access to driver and LED boards. Custom sizes are available.

### REFLECTOR

Integral powder-coated LED housing with excessive reflectivity for increased lumen output

### FINISH


Standard powder-coated colors are white and black. Custom processed wood finishes and aluminum anodized finishes are available as well: see finishes chart. We will also accept RAL and Pantone numbers for powder-coating color choices.

### OPTICS

Regressed, lay-in acrylic lens formulated for LED light sources. Lift and shift lens.

### MOUNTING

Cable mounting with various size canopies and power feeds. Cable uses gripper style locking for field adjustments with 5 feet of cable standard. Canopy mounts to standard J-box. Can also be stem mounted with canopy. See accessories for more information.



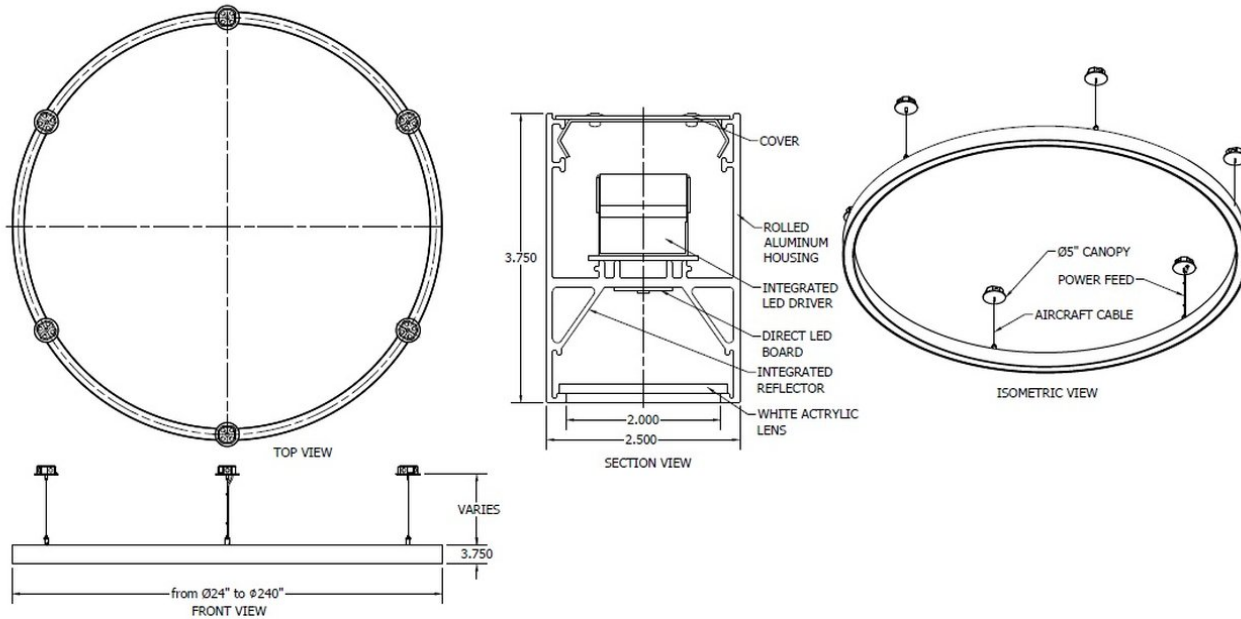


## ANELLO PENDANT DIRECT

# Anello Pendant

PENDANT

TYPE  
PROJECT

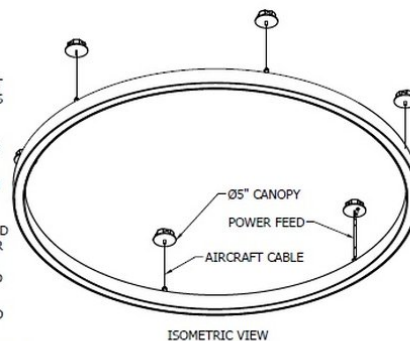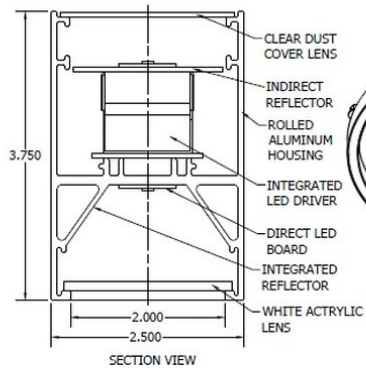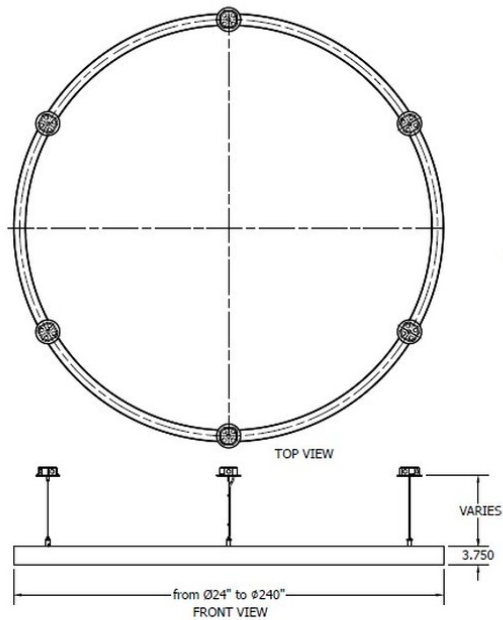

## ANELLO PENDANT DIRECT/INDIRECT

## Electrical / Driver

- Our drivers are specifically selected based on fixture application to ensure ultimate reliability and long life. We use only UL recognized brands of LED drivers.
- If required, we can supply premium drivers such as Lutron, Eldoled and others upon request. Advanced control systems compliant drivers such as POE, DALI, DMX, etc. are also available.
- Rated life (90% survivorship) of 50,000 hours at 50° C max. ambient (and 70° C max. case) temperature. At maximum driver load: Efficiency >84%, PF>0.9, THD
- Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming.
- Emergency drivers are factory installed, long life, high temperature, recyclable Ni-Cad battery pack with test switch and charge indicator. EMR is minimum of 90 minutes operation to meet code.

## LED Performance

| LED Output | CCT Color Temp | Watts                            | Lumens   | Lumens per Watt | CCT Multiplier |
|------------|----------------|----------------------------------|----------|-----------------|----------------|
| Low        | 3000           | xx WPF Direct (4 WPF Indirect)   | 350 LPF  | TBD             | 2700 = .95     |
| Medium     | 3000           | xx WPF Direct (5.8 WPF Indirect) | 500 LPF  | TBD             | 3000 = 1       |
| High       | 3000           | xx WPF Direct (8.6 WPF Indirect) | 750 LPF  | TBD             | 3500 = 1.01    |
| Very High  | 3000           | xx WPF Direct                    | 1000 LPF | TBD             | 4000 = 1.03    |

- The table above is a quick reference. When calculating loads make sure you add direct and indirect LPW to get total wattage. Please refer to photometric report for detailed information.
- Our light engines are precisely designed for optimal operation of LED assemblies.
- Our standard LED's CCT (correlated color temperature) range is 2700K to 4000K. Other CCT values are available upon request.
- We log LED bin codes for each project we supply to ensure color consistency and keep a record of those projects for future reference.
- CRI offered is 80+, and 90+ Note: on 90+ CRI use .85 multiplier
- Tunable white, warm dim and other special LED colors available.
- We design our own printed circuit boards to ensure high luminescence efficiency, low thermal resistance and long-term reliable operation.
- Light engines are easily replaced.
- We use only recognized brand LED's with 3 SDCM (standard deviation color matching) with high color consistency. 2 SDCM available upon request.
- LRP - "LED Reel Program" – LED's for printed circuit boards come on reels' like old 8mm projectors and they're sold in lots just like fabric. At Picasso Lighting, we have a program where we make sure all of your reels come from the same lot for each project. This ensures excellent color consistency in large open spaces.
- LED life is rated at 50,000 hours
- Custom Lumens Available

## Certifications & Warranties

- Limited five-year (50,000 hours) warranty on all products.
- We can produce I.C. rated fixtures upon request.
- We are IBEW manufactured and assembled
- UL and CUL listed for dry and damp locations.
- Chicago Plenum products are available upon request.
- Made in the U.S.A.



Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.